


ROLL A SHADE


SIGNATURE SERIES

INTERIOR


Please check specifications for color availability as not all colors are available in all openness factors.

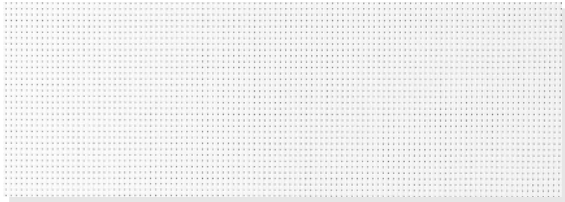

Brite White | White Privacy, 1%, 3%, 5%, 10%

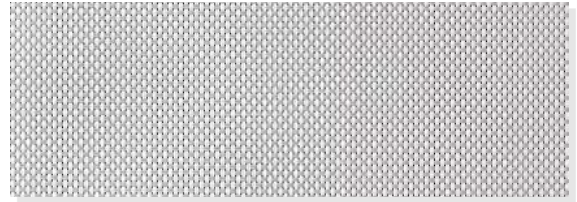


White | Gray Privacy, 1%, 3%, 5%, 10%

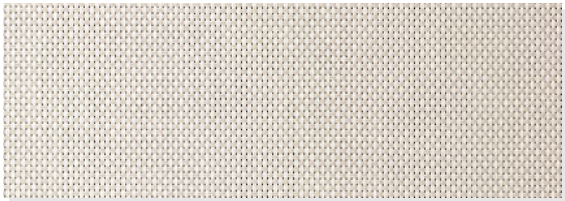


White | Linen Privacy, 1%, 3%, 5%, 10%



Bone | Bone 1%, 3%

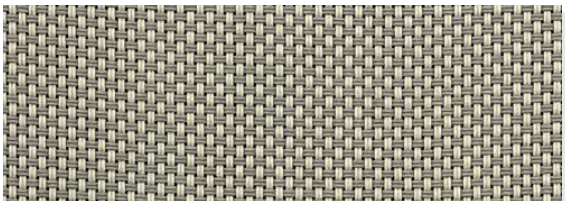

Beige | Gray 1%, 3%, 5%

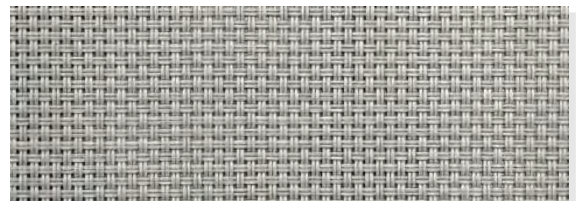

Gray | Gray 1%, 3%, 5%




Black | Gray 1%, 3%, 5%



Black | Dark Gray 1%, 3%, 5%




Charcoal | Bronze 1%, 3%, 5%

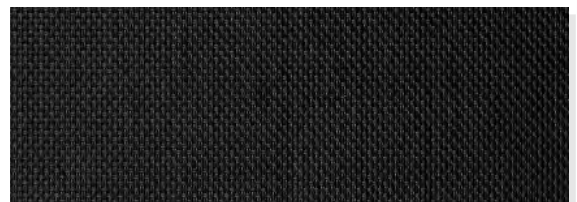


Black | Black Privacy, 1%, 3%, 5%

SIGNATURE SERIES


OPACITY

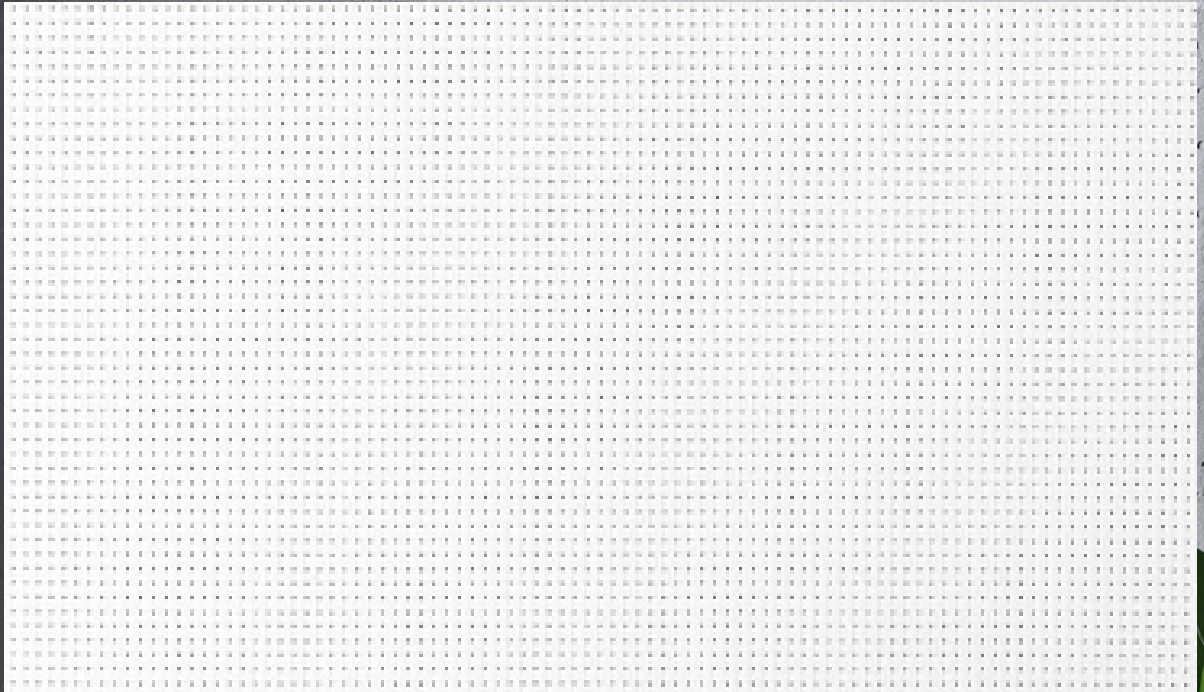


Brite White | White 5%

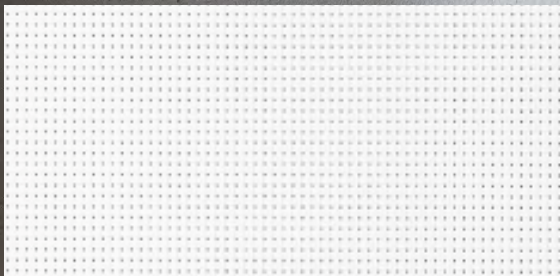


Brite White | White 1%

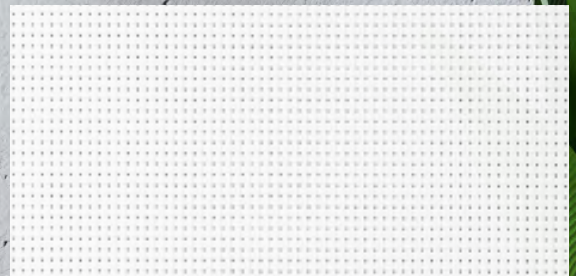

Brite White | White 3%

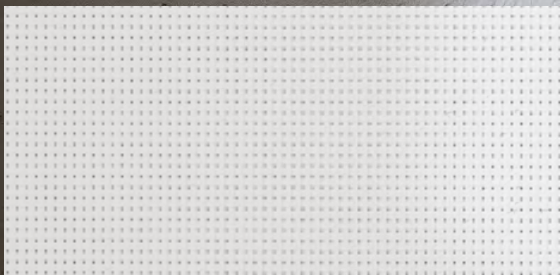

Brite White | White 10%

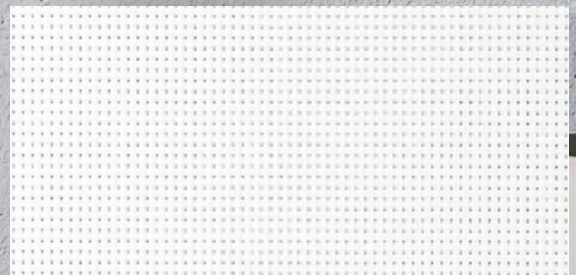

Brite White | White Privacy

PRIVACY

OPENNESS FACTOR

<0.1%

WEIGHT

15.62oz/sq yd.
(529g/sqm) (+/- 5%)

THICKNESS

0.0271IN (0.69MM) +/-5%

WIDTHS

78.7" (200CM),
98.4" (250CM), 118" (300CM)

STANDARD ROLL LENGTH

33 lyds (30m)

*Performance evaluations conducted in accordance to requirements

TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance

1/8CL = 1/8" Clear Glass
1/4CL = 1/8" Clear Glass
1/4HA = 1/4" Heat Absorbing Glass

SIGNATURE SERIES 1%

OPENNESS FACTOR

1%

WEIGHT

14.57oz/sq yd.
(494g/sqm) (+/- 5%)

THICKNESS

0.025 in (0.63mm) +/-5%

WIDTHS

78.7" (200cm),
98.4" (250cm), 118" (300cm)

STANDARD ROLL LENGTH

33 lyds (30m)

SOLAR OPTICAL PROPERTIES* SHADING COEFFICIENT

COLOR NO.	COLOR	TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
001	Brite White White	19	72	9	16	0.29	0.30	0.30
003	White Gray	9	55	36	5	0.39	0.39	0.35
016	White Linen	11	60	29	7	0.37	0.36	0.33
914	Black Black	0	4	96	0	0.73	0.69	0.50

SOLAR OPTICAL PROPERTIES* SHADING COEFFICIENT

COLOR NO.	COLOR	TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
001	Brite White White	20	72	8	17	0.30	0.31	0.30
003	White Gray	10	52	38	6	0.42	0.41	0.36
016	White Linen	14	60	26	9	0.37	0.37	0.34
914	Black Black	1	4	95	2	0.73	0.69	0.50
1241	Charcoal Bronze	2	8	90	2	0.71	0.67	0.49
906	Black Dark Gray	1	11	88	2	0.68	0.65	0.48
404	Bone Bone	12	55	33	6	0.40	0.40	0.35
203	Beige Gray	10	41	49	6	0.50	0.48	0.39
303	Gray Gray	5	32	63	3	0.55	0.53	0.42
903	Black Gray	2	15	83	2	0.66	0.62	0.47

SIGNATURE SERIES 3%

OPENNESS FACTOR

3%

WEIGHT

13.93oz/sq yd.
(472g/sqm) (+/- 5%)

THICKNESS

0.0241IN (0.61MM) +/-5%

WIDTHS

78.7" (200CM),
98.4" (250CM), 118" (300CM)

STANDARD ROLL LENGTH

33 lyds (30m)

SOLAR OPTICAL PROPERTIES* SHADING COEFFICIENT

COLOR NO.	COLOR	TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
001	Brite White White	22	70	8	19	0.32	0.32	0.31
003	White Gray	12	49	39	9	0.44	0.43	0.37
016	White Linen	17	57	26	13	0.40	0.40	0.35
914	Black Black	3	4	93	5	0.73	0.69	0.51
1241	Charcoal Bronze	5	9	86	7	0.70	0.67	0.49
906	Black Dark Gray	4	12	84	5	0.69	0.65	0.48
404	Bone Bone	14	54	32	8	0.41	0.41	0.36
203	Beige Gray	13	39	48	9	0.52	0.50	0.40
303	Gray Gray	7	33	60	4	0.55	0.52	0.42
903	Black Gray	5	18	78	4	0.65	0.61	0.47

SIGNATURE SERIES 5%

OPENNESS FACTOR

5%

WEIGHT

12.71oz/sq yd.
(431g/sqm) (+/- 5%)

THICKNESS

0.0231IN (0.60MM) +/-5%

WIDTHS

78.7" (200CM),
98.4" (250CM), 118" (300CM)

STANDARD ROLL LENGTH

33 lyds (30m)

SOLAR OPTICAL PROPERTIES* SHADING COEFFICIENT

COLOR NO.	COLOR	TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
001	Brite White White	25	68	7	22	0.35	0.35	0.37
003	White Gray	14	49	37	11	0.45	0.44	0.35
016	White Linen	19	57	24	15	0.41	0.40	0.51
914	Black Black	5	4	91	8	0.74	0.70	0.50
1241	Charcoal Bronze	7	8	85	10	0.71	0.68	0.33
906	Black Dark Gray	5	11	84	5	0.70	0.66	0.49
203	Beige Gray	15	40	45	11	0.52	0.50	0.41
303	Gray Gray	11	32	57	8	0.57	0.54	0.43
903	Black Gray	6	17	77	5	0.65	0.62	0.47

SIGNATURE SERIES 10%

OPENNESS FACTOR

10%

WEIGHT

11.65oz/sq yd.
(395g/sqm) (+/- 5%)

THICKNESS

0.0221IN (0.56MM) +/-5%

WIDTHS

78.7" (200CM),
98.4" (250CM), 118" (300CM)

STANDARD ROLL LENGTH

33 lyds (30m)

SOLAR OPTICAL PROPERTIES* SHADING COEFFICIENT

COLOR NO.	COLOR	TS	RS	AS	TV	1/8CL	1/4CL	1/4HA
001	Brite White White	29	63	8	25	0.39	0.38	0.35
003	White Gray	18	42	40	19	0.51	0.49	0.40
016	White Linen	22	55	23	17	0.43	0.42	0.36

FIRE CLASSIFICATION

CALIFORNIA U.S. TITLE 19,
CAN/ULC-S109-14, NFPA701-2019 TM#1
BS 5867:2008 PART 2: TYPE B

BACTERIA AND FUNGAL RESISTANCE

ASTM E2180, ASTM G21, AATCC 30 PART 3
ENVIRONMENTAL CERTIFICATIONS
GREENGUARD, GREENGUARD Gold,
REACH, and RoHS - Lead Free

COMPOSITION

24% Polyester / 76% PVC

rollashade.com | 1.888.245.5077 | ©2025 RASISCVVER.6



Roll A Shade® logo is a registered trademark of Roll A Shade® Inc.
GREENGUARD is a registered trademark of GREENGUARD Environmental Institute